










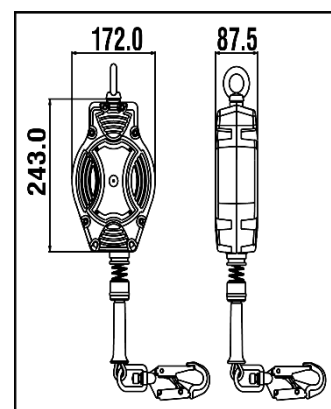





# Helixon



| HS CODE   |
|---|
| 84798997  |
| CARTON SIZE / PCS.  |
| 60 x 40 x 24 cm / 4   |
| FA 20 402 10B : AET N°2777/10832-02/E01-01<br>FA 20 402 10S: AET N°2777/10832-02/E05-01                       |
| <b>Satra Technology Europe Ltd., N° 2777,</b><br>Bracetown Business Park, Clonee,<br>Dublin, D15YN2P, Ireland |
| MODULE D FI14/14003.02  |
| <b>SGS Fimko Oy, N°0598</b><br>Takomotie 8,<br>00380 HELSINKI, Finland  |
| ACKNOWLEDGEMENT OF RECEIPT N°3975/1/2018 (ATEX)   |
| <b>Technická Inšpekcia, a.s. N°1354</b><br>Trnavská cesta 56, 821 01 Bratislava, Slovenská Republika          |



| REF.   | FA 20 402 10B   | FA 20 402 10S   |
|--|---|---|
| <b>LG.</b><br>  | 10 m<br><hr style="border-top: 1px dashed black;"/> 140 KG  |   |
| <b>CE</b>  | EN 360:2002   |   |
| <b>MAT.</b><br> | Polyamide 6 - 30% fiber glass   |   |
|                 |  <b>STEEL</b> Ø4.5 mm<br>FA 50 101 17 / FA 50 203 20 with fall indicator |  <b>INOX</b> Ø4.5 mm<br>FA 50 101 17 / stainless steel connector with fall indicator |
|                | x2  |   |
| <b>R(kN)</b>   | 12 kN   |   |
|               | NO  |   |
| <b>+</b>   |  II 2 Exh IIC T6 Gb<br>EN 360 §4.6 (endurance test)                    |   |
|               | 4.27 KG   | 4.28 KG   |

|   |  |   |
|---|--|---|
| <b>LG.</b><br>   | <b>MAT.</b><br>   |    |
| <b>Longueur</b> Poids maxi utilisateur<br><b>Length</b> Max. user weight<br><b>Longitud</b> Peso máximo del usuario<br><b>Lunghezza</b> Peso Max. dell'utente<br><b>Länge</b> Höchstgewicht des Benutzers | <b>Matière carter / câble</b><br>Material of casing / wire rope<br><b>Material cárter / cable</b><br>Material dei carter / cavo<br><b>Material Gehäuse / Seil</b>  | <b>Matière connecteur haut / connecteur bas</b><br>Material of top connector / bottom connector<br><b>Material conector alto / conector bajo</b><br>Materiale connettore alto / connettore basso<br><b>Material oberes / unteres Verbindungselement</b> |
|    |    |   |
| <b>Nombre d'émerillons</b><br>Number of swivels<br><b>Cantidad de eslabones giratorios</b><br>Numero di tornichetti<br><b>Anzahl der Wirbel</b>   | <b>Homologué pour le travail à proximité d'arêtes vives</b><br>Approved for work near sharp edges<br><b>Homologado para trabajo cerca de aristas vivas</b><br>Omologato per lavoro in prossimità di spigoli vivi<br><b>Zugelassen für Arbeiten in der Nähe scharfer Kanten</b> |   |