




ARDON®
WORKWEAR
& OUTDOOR

ARDON® SOFTEX HIGH S1P

SAFETY SHOES

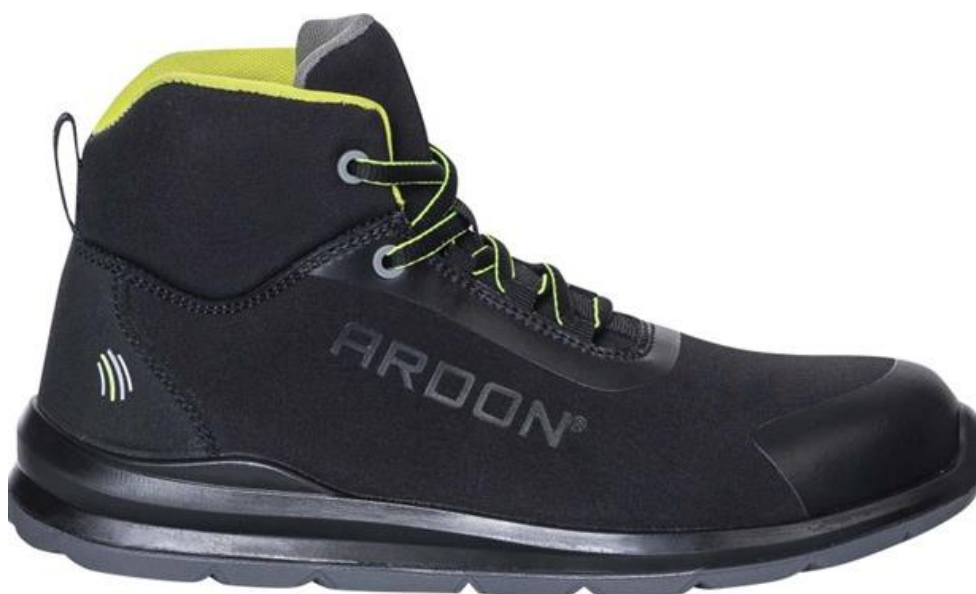

DRY AIR



DEFUSE
CONTROL



WASH-FRIENDLY

TECHNICAL SHEET



ARDON®
WORKWEAR
& OUTDOOR

ARDON® SOFTEX HIGH S1P

SAFETY SHOES

ARTICLE

G3404

COLOUR MATERIAL

Upper
Lining
Sole
Toe cap
Plate
Insole

black/yellow

textilie tytu SOFTSHELL

MESH laminated breathable fabric

PU/PU, two-component spray coating, oil resistant, anti-static, antislip

steel 604

steel

ANATOMIC GEL - anatomically shaped from PU foam with a gel cushioning in the heel area

SIZE

38-50

UNIT

pair

PACKAGE

Units in a carton

10 pairs

Units in a box

1 pair

DIMENSIONS

Carton H x W x D
(cm)

38-41

57x 33 x 38,5

42-45

59,5x 35,5 x 40,5

46-50

62x38x41,5

Carton (cbm)

0,0724

0,0855

0,0978

| Size EUR | 35 | 36 | 37 | 38 | 39 | 40 | 41 | 42 | 43 | 44 | 45 | 46 | 47 | 48 | 49 | 50 | 51 |
|------------------|----|----|----|------|------|------|------|------|------|------|------|------|------|------|------|------|----|
| Insole length mm | - | - | - | 248 | 255 | 262 | 270 | 276 | 283 | 290 | 297 | 304 | 310 | 317 | 323 | 330 | - |
| Foot length cm | - | - | - | 24,3 | 25,0 | 25,7 | 26,5 | 27,1 | 28,3 | 28,5 | 29,2 | 29,9 | 30,5 | 31,2 | 31,8 | 32,5 | - |

DESCRIPTION

Safety softshell low shoe in sporty design. The ANATOMICGEL insole with a cushioning gel element in the heel takes care of the increased comfort of the shoes. The shoes are equipped with a steel toe and an anti-puncture insole. The stable polyurethane sole made by direct spraying provides the highest level of anti-slip properties.

TECHNICAL SHEET

NORMS















(EU) 2016/425

EN ISO 20345:2011

Category

Personal protective equipment – Safety footwear

S1P SRC

| Categories | EN ISO 20345 | |
|------------------------------------------------------------------------------------------------|--------------|---------------------------------------------------------------------------------------|
| E - energy absorption in the heel area | ✓ |  |
| FO - resistance to oils and fuels | ✓ |  |
| A - antistatic footwear | ✓ |  |
| SRC - resistance to slipping on ceramic floor tiles with SLS and on steel floors with glycerin | ✓ |  |
| WR - upper resistant to water | |  |
| Safety toe cap for toe protection | ✓ |  |
| P - resistance to punctures (protective insole) | ✓ |  |
| SRA - slip resistance ceramic floor tiles with SLS | |  |
| HRO - resistance to contact heatup to 300 °C | |  |
| HI-insulation of the bottom of the shoe against heat | |  |
| CI-insulation of the bottom of the shoe against the cold | |  |
| Splatters of molten metal | |  |
| ESD – shoe protects against electrostatic discharge and can be used on EPA premises | |  |
| The shoes do not contain metal parts | |  |
| - | | |
| - | | |
| - | | |



ARDON®
WORKWEAR
& **OUTDOOR**

| CODE | EAN | CARTON WEIGHT (KG) | UNIT WEIGHT (KG) |
|----------|---------------|-----------------------|---------------------|
| G3404/38 | 8592390168979 | 12.3 | 1.23 |
| G3404/39 | 8592390168986 | 12.6 | 1.26 |
| G3404/40 | 8592390168993 | 12.8 | 1.28 |
| G3404/41 | 8592390169006 | 13.1 | 1.31 |
| G3404/42 | 8592390169013 | 13.5 | 1.35 |
| G3404/43 | 8592390169020 | 14.0 | 1.40 |
| G3404/44 | 8592390169037 | 14.5 | 1.45 |
| G3404/45 | 8592390169044 | 15.0 | 1.50 |
| G3404/46 | 8592390169051 | 15.7 | 1.57 |
| G3404/47 | 8592390169068 | 16.2 | 1.62 |
| G3404/48 | 8592390169075 | 16.7 | 1.67 |
| G3404/49 | 8592390169082 | 17.1 | 1.71 |
| G3404/50 | 8592390169099 | 17.8 | 1.78 |



ARDON®

**WORKWEAR
& OUTDOOR**





ARDON®
WORKWEAR
& OUTDOOR

